



LEDBHB

100W & 150W ROUND LED HIGH BAY

APPLICATIONS

The LEDBHB100/150 is a round LED high bay luminaire, which is designed to illuminate a wide variety of settings, including commercial, industrial & retail settings such as warehouses, manufacturing plants, sporting venues and big-box retailers. With a die cast aluminum housing and polycarbonate lens, the LEDBHBXXX provides durability and high performance. High-efficacy, long-life LEDs provide both energy and maintenance cost savings compared to traditional, HID high bays.

FEATURES

- Available in 5000k color temperatures.*
- Long-life LEDs provide 80,000 hours of operation with at least 70% of initial lumen output (L_{70}).**
- LEDBHB100UNV-50K 13,116 lumens (127 LPW) 5000k.*
- LEDBHB150UNV-50K provides 18,450 lumens (121 LPW) 5000k.*
- Universal 120-277 AC voltage (50-60Hz) is standard. Step down transformers are required for 347-480V applications.
- 0-10Vdc dimming drivers are standard.
- Watertight, compression-type electrical connectors prevent moisture intrusion.
- Standard mounting bracket and optional mounting accessories provide ceiling and conduit mounting, and up to 100° of adjustability.
- Optional wet-location junction box & bracket (LEDBHB150-JBOX) attaches to luminaire housing, and simplifies wiring connections in wet locations.
- Optional Merrytek occupancy sensor (IP65 rated) and junction box assembly provides a factory-ready, fully-wired luminaire & control package.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Painted die cast aluminum housing.
- Easy installation in new construction or retrofit.



Waterproof Junction Box,
Mounting Bracket &
Merrytek Sensor



* Contact factory for other color temperatures and lumen packages.

** L_{70} hours are IES TM-21-11 calculated hours.



MOUNTING OPTION

- Suspension from pre-installed mounting hook (cast iron M10 eyebolt) with locking set screw is standard.
- Ceiling-mounted installation (using optional yoke mounting bracket, (LEDBHB-YOKE) provides up to 100° of adjustability.
- Two ways to mount luminaire to electrical conduit:
- Attach conduit (1/2" NPS) to optional yoke mounting bracket (LEDBHB-YOKE).
- Optional snap hook (LEDBHB-SN) attaches to electrical conduit (1/2" NPS).

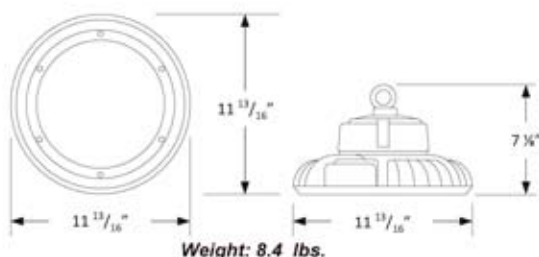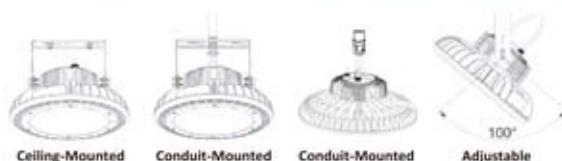

WARRANTY & LISTINGS

- cULus listed for wet locations (-20°C to 45°C / -4°F to 113°F).
- IP65 rated for ingress protection.
- DLC standard approved.
- Complies with FCC Part 15, class B.
- Complies with EN61000-4-5, surge immunity protection (4kV).
- 5-year warranty of all electronics and housing.

PRODUCT PARAMETER

MODEL	LUMINAIRE WATTS	LUMINAIRE LUMENS	LUMENS PER WATT	COLOR TEMPRETURE	OPTIONS (ORDER SEPARATELY)
LEDBHB100UNV-50K	103	13,116	127	5K = 5000k	LEDBHB-SH = Snap hook LEDBHB-YOKE = Yoke mount bracket LEDBHB-JBMB = Junction box & mounting bracket LEDBHB-OSJBOX = Merrytek IP65-Rated, microwave occupancy sensor, junction box & mounting bracket
LEDBHB150UNV-50K	152	18,450	121	5K = 5000k	



LEDBHB

100W & 150W ROUND LED HIGH BAY

ELECTRIC DATA

MODEL	COLOR TEMP.	CRI ¹	LUMINAIRE LUMENS	LUMINAIRE WATTS	LUMENS/ WATTS	INPUT VOLTAGE ²	INPUT CURRENT (A)			POWER FACTOR	THD ³	L ₇₀ HOURS ⁴
							120V	240V	277V			
SPECIAL ORDER	4000k	>80	13,093	103	127	120-277	0.86	0.43	0.37	>90%	<20%	80,000
LEDBHB100UNV-50K	5000k	>80	13,116	103	127	120-277	0.86	0.43	0.37	>90%	<20%	80,000
SPECIAL ORDER	4000k	>80	18,240	152	120	120-277	1.27	0.63	0.55	>90%	<20%	80,000
LEDBHB150UNV-50K	5000k	>80	18,450	152	121	120-277	1.27	0.63	0.55	>90%	<20%	80,000

¹ Color rendering index.


² All 50-60Hz.

³ Total harmonic distortion.

⁴ L₇₀ refers to the number of hours at which lumen output declines to 70% of the initial level. L₇₀ hours are IES TM-21-11 calculated hours.

PHOTOMETRIC DATA

LEDBHB100UNV-50K (13,116 Lumens)

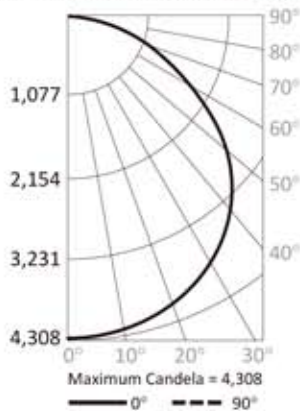


Candlepower Summary

	0°	90°
0°	4,308	4,308
10°	4,265	4,259
20°	4,089	4,073
30°	3,788	3,758
40°	3,345	3,305
50°	2,755	2,727
60°	1,918	1,878
70°	1,012	974
80°	220	199
90°	2	3


Zonal Lumen Summary

Zone	Lumens	% Fixture
0° - 10°	636	4.9%
0° - 20°	2,527	19.3%
0° - 30°	5,561	42.4%
0° - 40°	9,158	69.8%
0° - 50°	11,544	88.0%
0° - 60°	12,434	94.8%
0° - 70°	12,870	98.1%
0° - 80°	13,066	99.6%
0° - 90°	13,090	99.8%
90° - 180°	26	0.2%
0° - 180°	13,116	100.0%

Cone of Light

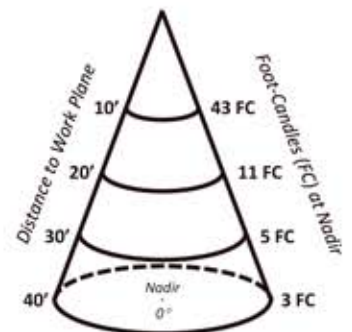

LEDBHB150UNV-50K (18,450 Lumens)

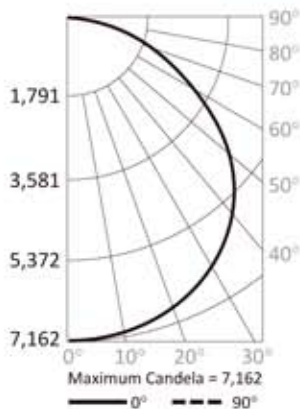


Candlepower Summary

	0°	90°
0°	7,162	7,162
10°	7,105	7,127
20°	6,837	6,839
30°	6,357	6,373
40°	5,626	5,623
50°	4,610	4,626
60°	3,223	3,233
70°	1,644	1,683
80°	273	332
90°	1	1

Zonal Lumen Summary

Zone	Lumens	% Fixture
0° - 10°	620	3.4%
0° - 20°	2,415	13.1%
0° - 30°	5,184	28.1%
0° - 40°	8,594	46.6%
0° - 50°	12,190	66.1%
0° - 60°	15,334	83.1%
0° - 70°	17,491	94.8%
0° - 80°	18,343	99.4%
0° - 90°	18,409	99.8%
90° - 180°	41	0.2%
0° - 180°	18,450	100.0%

Cone of Light

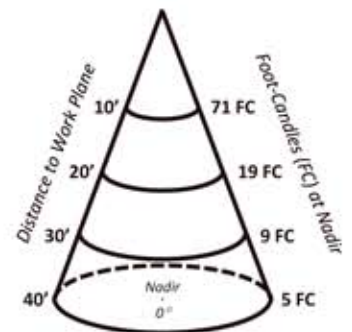





LEDBHB

100W & 150W ROUND LED HIGH BAY

PHOTOMETRIC DATA

LEDBHB100UNV-50K (13,116 Lumens)

LEDBHB150UNV-50K (18,450 Lumens)

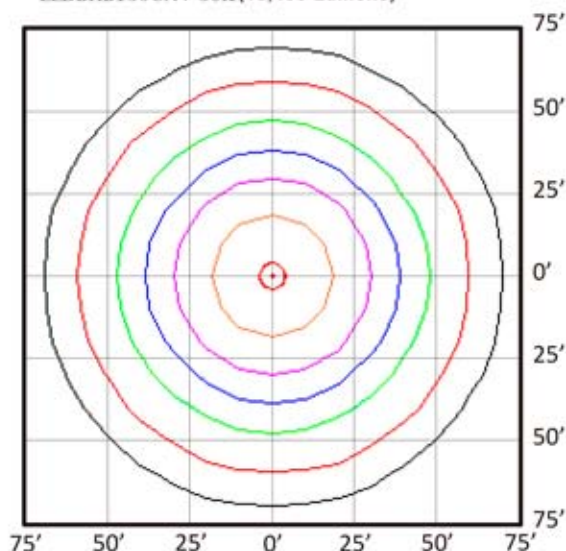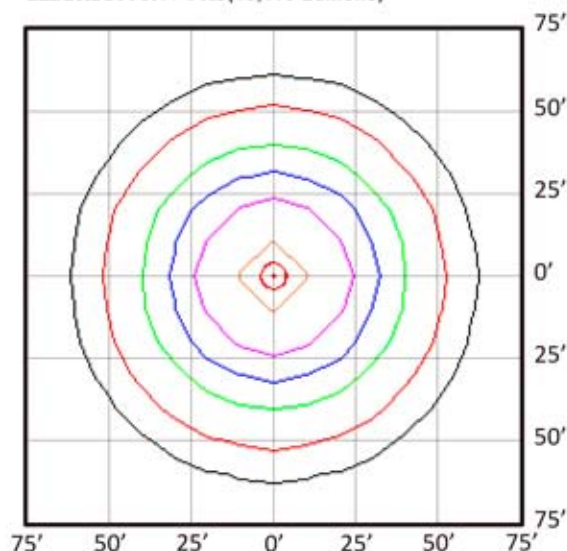

Foot Candles



Notes:

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 25 feet.