

LEDGFS50UNV

50 Watt Multi-Purpose LED Area Light



Project:	
Type:	
Catalog #:	

STANDARD



The LEDGFS series is a group of architectural LED area luminaires designed to illuminate parking areas, pathways, building facades, loading docks, and a wide variety of other large, general site lighting applications. Multiple mounting options make the LEDGFS a versatile luminaire for flood lighting, pole-, ground- and wall-mounted area lighting, and other outdoor lighting requirements.

- Replaces MH150/175W.

FEATURES 30K and 40K Optional • 50K in stock.

- Available in 3000k (warm white), 4000K (neutral white) and 5000K (cool white).*
- Long-life LEDs provide 69,000 hours of operation with at least 70% of initial lumen output (L_{70}).*
- Delivers 5,882 lumens & 118 lumens per watt (LPW) at 3000k; 6,031 lumens and 121 LPW at 4000k; and 6,179 lumens & 124 LPW at 5000k.*
- Standard optic provides an IES roadway type V distribution, or a 7V (vertical) x 7H (horizontal) NEMA floodlight distribution.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Optional full glare shields, half glare shields & wire guards are available.
- Die cast aluminum housing with durable, dark bronze powder coat finish, and a heat-resistant polycarbonate lens.
- Wireway enclosure is sealed with a water-tight, silicon rubber gasket.
- Effective projected areas (EPA's) are:
 - Front = 0.13 square feet
 - Side = 0.09 square feet
 - Face = 0.43 square feet
- Easy installation in new construction or retrofit applications.

* Contact factory for other color temperatures and lumen packages.
* L_{70} hours are IES TM-21-11 calculated hours.



Knuckle-Mount


WARRANTY & LISTINGS

- cULus listed for wet locations (-30°C to 40°C / -22°F to 104°F)
- IP65 rated.
- DLC standard approved.
- Complies with FCC Part 15, Class B.
- Complies with EN61000-4-5, surge immunity (1kV).
- 5-year warranty on all electronics and housing.

MOUNTING OPTIONS

- Yoke-mount option provides secure attachment to flat surfaces.
- Aluminum die-cast knuckle-mount option is installed on a junction box. Includes 1/2" NPS stem with locking nut.

DIMENSIONS

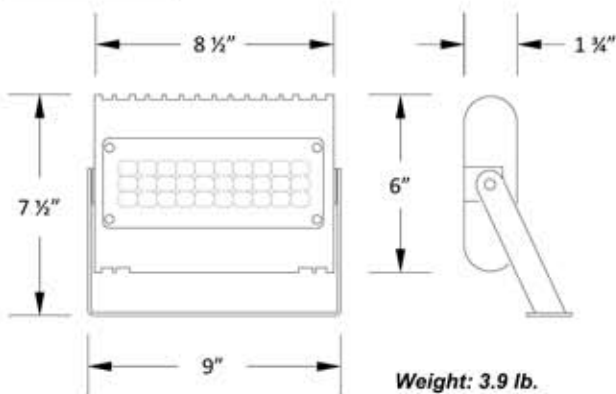


ORDERING INFORMATION

Example: LEDGFS50UNV-50K-WG

Model	Luminaire Watts	Luminaire Lumens	Lumens / Watt	Mounting Options	Color Temperature	Shields & Wire Guards (See Line Drawings Below)
LEDGFS50 UNV	50	5,882 6,031 6,179	118 121 124	K = Knuckle Mount	3K = 3000k 4K = 4000k 5K = 5000k	LEDGFSGS = Full Glare Shield, 15W LEDGFSGSH = Half Glare Shield, 15W LEDGFSWG = Wire Guard, 15W

ELECTRICAL DATA


Model	Color Temperature	CRI ¹	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage ²	Input Current (A)			Power Factor	THD ³	L ₇₀ Hours ⁴
							120V	240V	277V			
LEDGFS50UNV-30K	S.O. 3000k	> 80	5,882	50	118	120-277	0.42	0.21	0.18	> 90%	< 20%	69,000
LEDGFS50UNV-40K	S.O. 4000k	> 80	6,031	50	121	120-277	0.42	0.21	0.18	> 90%	< 20%	69,000
LEDGFS50UNV-50K	5000k	> 80	6,179	50	124	120-277	0.42	0.21	0.18	> 90%	< 20%	69,000

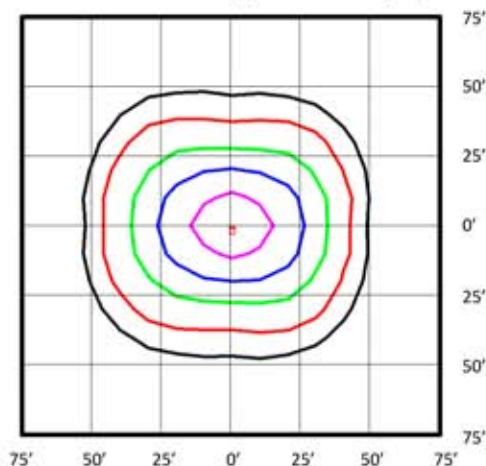¹ Color rendering index. • S.O.= Special Order² All 50-60Hz.³ Total harmonic distortion.⁴ L₇₀ refers to the number of hours at which lumen output declines to 70% of the initial level. L₇₀ hours are IES TM-21-11 calculated hours.**PHOTOMETRIC DATA****LEDGFS50UNV-50K(6,179 Lumens , Type V Distribution)****Foot Candles****Luminaire Orientation:****Notes:**

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 25 feet.

BUG Rating: B2-U1-G1

Zone	Lumens	%
FL - Front - Low (0-30)	800	13%
FM - Front - Medium (30-60)	1,684	27%
FH - Front - High (60-80)	518	8%
FVH - Front - Very High (80-90)	61	1%
Total Forward Light	3,063	50%
BL - Back - Low (0-30)	808	13%
BM - Back - Medium (30-60)	1,691	27%
BH - Back - High (60-80)	538	9%
BVH - Back - Very High (80-90)	67	1%
Total Back Light	3,104	50%
UL - Up Light - Low (90-100)	3	0%
UH - Up Light - High (100-180)	9	0%
Total Up Light	12	0%
Total Lumens	6,179	100%

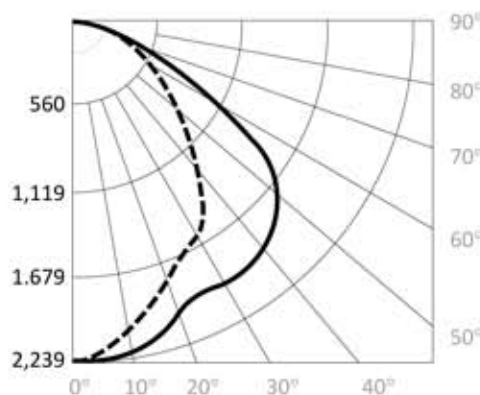

Maximum Candela = 2,239


— Horizontal
- - - Vertical

NEMA Floodlight Type Data**Field Angles:**

- Horizontal 160°
- Vertical 159°

NEMA Type:

- Horizontal 7H
- Vertical 7V

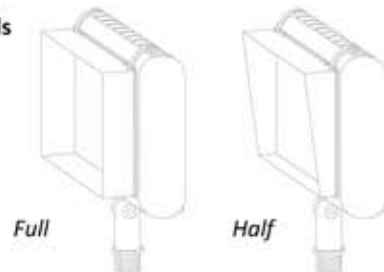Luminaire Orientation:**Shields****Wire Guards**